



SILO 40 SUSPENSION



FEATURES

- + Minimalist cylinder design, available in various colours and lengths
- + Sophisticated lens technology for enhanced visual comfort
- + Black baffle for reduced glare
- + Seamless canopy with quick connection for easy installation
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)



GENERAL SPECIFICATIONS

LED	6W	
Lumens	520 lm (3000K & 4000K)	
Efficacy	79 lm/w (3000K & 4000K)	
Colour Temp	<input type="checkbox"/> 3000K, Warm White	<input type="checkbox"/> 4000K, Cool White
Material	Powder Coated Aluminium	
Finish	White Black	
Beam	15° 24° 36° 45° 60°	
CRI	92+	
IP	20	
Colour Deviation	SDCM ≤2	
UGR	<15	
Lifetime	>55,000hrs L80 B10	
Warranty	5 Years	
Additional Lens Options	15° Lens	118-SIL4015
	25° Lens	118-SIL4024
	36° Lens	118-SIL4036
	45° Lens	118-SIL4045
Additional Baffle Options	Black Baffle	118-SIL40BB
	White Baffle	118-SIL40BG
	Gold Baffle	118-SIL40BG


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS (mm)

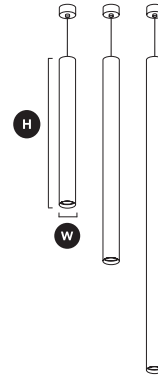

Ø40mm, 3 Heights Available

Height (H)	280mm	380mm	580mm
Width (W)	Ø40mm	Ø40mm	Ø40mm

Canopy Dimensions (Applicable to all heights)

Width Ø40mm x Height 30mm

DRIVER SPECIFICATIONS

Power	150mA 240V Built-In Flicker Free Dimmable Driver
Dimming	Phase-Cut Dimming
Power Factor	>0.90

PRODUCT CODES

280, White, 3000K, 60°	118-SIP42806W603
280, White, 4000K, 60°	118-SIP42806W604
280, Black, 3000K, 60°	118-SIP42806B603
280, Black, 4000K, 60°	118-SIP42806B604
380, White, 3000K, 60°	118-SIP43806W603
380, White, 4000K, 60°	118-SIP43806W604
380, Black, 3000K, 60°	118-SIP43806B603
380, Black, 4000K, 60°	118-SIP43806B604
580, White, 3000K, 60°	118-SIP45806W603
580, White, 4000K, 60°	118-SIP45806W604
580, Black, 3000K, 60°	118-SIP45806B603
580, Black, 4000K, 60°	118-SIP45806B604

