


# STRATEGIC LIGHTING

## Asset LED IP65


### Emergency Twin + Single

210° Rotating Lens


Rotating Lens 110°



282mm



157mm

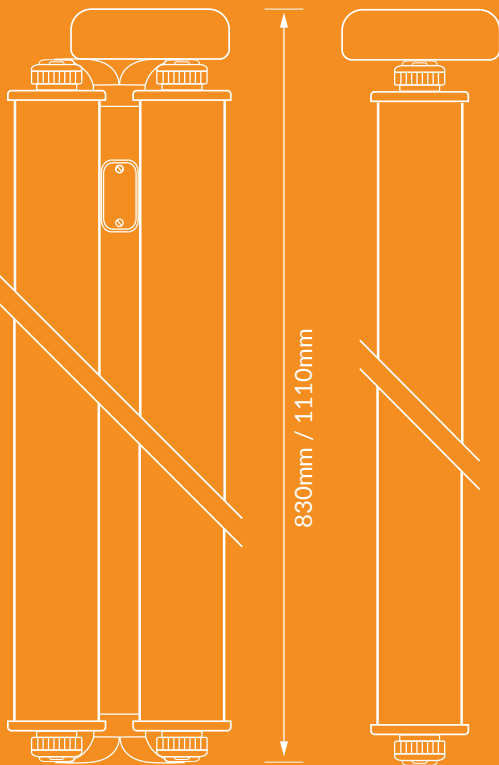

830mm / 1110mm



# ASSET Emergency

## LED Solid State Lighting



Classification

$C_0=D63$   $C_{90}=D50$

### Construction

<b>Body</b>	6000 Series Extruded Aluminium
<b>Lens</b>	Advanced High Impact, UV Stabilised Polycarbonate
<b>Optics Components</b>	Frosted Diffuser or 60° Optical Lens
<b>Mounting</b>	Injection Moulded Polymer Components For Durability & Long Life
	Variable Mounting Positions Along Spine
	Stainless Steel Mounting Clips
	Stainless Steel Over-Lock Clip For Vibration & Adverse Weather Conditions
<b>Control Gear</b>	Built-in Matching LED Drivers
	<ul style="list-style-type: none"> <li>Australian Made, High Thermal Transmission Heat Sink</li> <li>All Fittings Supplied with 5 Core Flex</li> </ul>



Mounting Clip

### Electrical Specifications

Model	Length (L)	LED	Lumens	Voltage (v)	Current (I)	Circuit Power
FPA 08148EM	830mm	1X48W	5880 lm	240v	0.33A	54W: $\lambda 0.98$
FPA 11172EM	1110mm	1X72W	8820 lm	240v	1.00A	150W: $\lambda 0.98$
FPA 08248EM	830mm	2X48W	11760 lm	240v	0.68A	102W: $\lambda 0.98$
Emergency Pod		2X3W		240v		0.4W

Specify When Ordering: • Medium Beam - 60° Lens  
• Wide Beam - Diffused Lens


### Emergency Lighting Pod

Classification:  $C_0=D63$   $C_{90}=D50$   
Batteries: Lithium Ion 3.3Volt 2.5Ah  
Standards: Emergency Lumen Output In Accordance With AS2293.1

### Options

- CCT: Standard 4000K; Optional 3000K, 5000K, 6000K
- DALI Dimmable Options

### Photometry

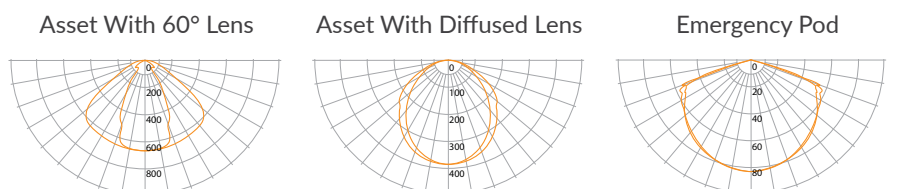

Lithium Ion Batteries



Impact Resistant

IP65 Rated



High Output LED

Energy Efficient