

Cilindro



Cilindro



FEATURES

- Australian designed and manufactured from high quality materials
- Energy efficient
- Customise colour to suit any décor
- Contemporary design for modern interior
- High quality VS LED components

OPTIONS

- Dimmable
- 25° beam angle
- Custom size (MOQ's apply)
- Colour options for housing
- Flex colour: white, black or clear

LUMINAIRE CONSTRUCTION


- Powder-coated aluminium extruded and machined housing
- VS LEDSpot ActiveLine 1000 with built-in reflector and aluminium heat sink
- Clear lens to protect reflector
- Powder-coated ceiling canopy
- Machined aluminium suspension fittings

ALL MODELS

- 240VAC 50HZ input (198-264VAC and over voltage protection)
- Mounting: surface mount or suspended

SUGGESTED APPLICATIONS

- Cafes and restaurants
- Foyers
- Kitchens
- Retail displays
- Stairwells

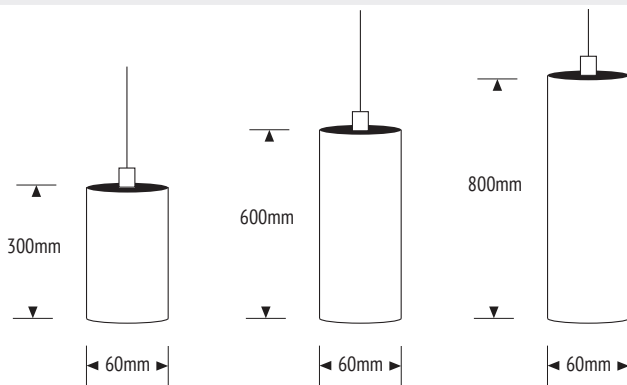

Model	Beam Angle	Light Source/ Lamp	Lumen Luminaire (lm)	Power Lamp (W)	Power Luminaire (W)	Colour Temp (°K)	Colour Rendering Index (CRI)	Power Factor	LED Qty	LED Type	LED Brand	IP Rating	Dimensions (mm)		Weight (kg)
													Ø	H	
CIL60LED7W300-830	40°	LED	730	7	10	3000	>80	0.97	n/a	COB	VS	IP20	60	300	0.7
CIL60LED7W300-840	40°	LED	750	7	10	4000	>80	0.97	n/a	COB	VS	IP20	60	300	0.7
CIL60LED10W300-830	40°	LED	1000	10	13	3000	>80	0.97	n/a	COB	VS	IP20	60	300	0.7
CIL60LED10W300-840	40°	LED	1045	10	13	4000	>80	0.97	n/a	COB	VS	IP20	60	300	0.7
CIL60LED7W600-830	40°	LED	730	7	10	3000	>80	0.97	n/a	COB	VS	IP20	60	600	1.1
CIL60LED7W600-840	40°	LED	750	7	10	4000	>80	0.97	n/a	COB	VS	IP20	60	600	1.1
CIL60LED10W600-830	40°	LED	1000	10	13	3000	>80	0.97	n/a	COB	VS	IP20	60	600	1.1
CIL60LED10W600-840	40°	LED	1045	10	13	4000	>80	0.97	n/a	COB	VS	IP20	60	600	1.1
CIL60LED7W800-830	40°	LED	730	7	10	3000	>80	0.97	n/a	COB	VS	IP20	60	800	1.6
CIL60LED7W800-840	40°	LED	750	7	10	4000	>80	0.97	n/a	COB	VS	IP20	60	800	1.6
CIL60LED10W800-830	40°	LED	1000	10	13	3000	>80	0.97	n/a	COB	VS	IP20	60	800	1.6
CIL60LED10W800-840	40°	LED	1045	10	13	4000	>80	0.97	n/a	COB	VS	IP20	60	800	1.6

MADE IN AUSTRALIA



5 year warranty. Refer to warranty card.

Due to continual improvement through research and development, EL-Electric reserves the right to change specifications without notice. Must be installed by a Licenced Electrician.