

Circa 1130

Suspended or Surface Mount



FEATURES

- Australian designed and manufactured
- Satin finish
- Suspended or surface mount
- Indirect lighting capabilities available on request

ALL MODELS

- 240VAC 50HZ input voltage with over voltage protection
- IP20 Indoor use only

LUMINAIRE CONSTRUCTION



- Rolled Australian extruded aluminium body
- Laser cut gear tray
- Black / White powder coat finish
- Plexiglas German opal acrylic diffuser

OPTIONS

- Different body colours on request
- DALI, Switch Dim or 0-10V dimmable available on request
- Rod suspension
- Recessed plaster trim (fitting must be installed from inside ceiling cavity)

SUGGESTED APPLICATIONS

- Cafes and restaurants
- Clubs
- Medical facilities
- Office and retail spaces
- Schools and universities
- Shopping centres
- Walkways and stairwells

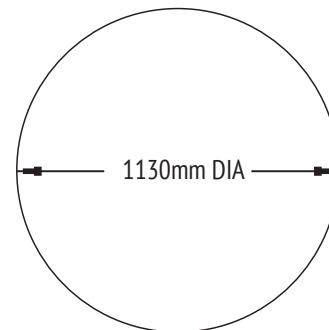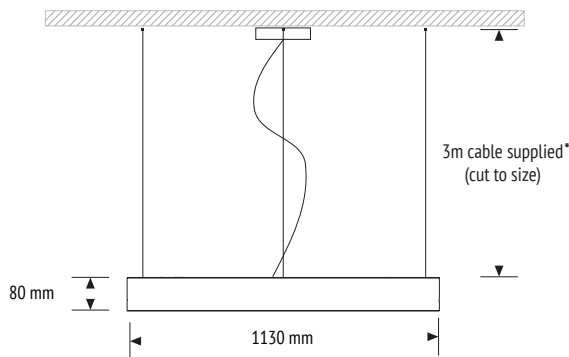

Model	Light Source/Lamp	Lumen Luminaire 3000K (lm)	Lumen Luminaire 4000K (lm)	Power Lamp (W)	Power Luminaire (W)	Colour Rendering Index (CRI)	Power Factor	LED Qty	LED Type	LED Brand	IP Rating	Weight (kg)
CIRC113074W-XXX	LED	10184	10720	74	80	80	0.96	1216	SMD	Nichia	IP20	15
CIRC113096W-XXX	LED	13617	14334	96	107	80	0.96	1216	SMD	Nichia	IP20	15
CIRC1130154W-XXX	LED	21471	22601	154	172	80	0.96	1216	SMD	Nichia	IP20	15

NOTE: XXX denotes CRI and colour temperature. E.g: CRI 80 and 3000°K = 830.
* Supplied with suspended models only.

Ordering Information :

CIRC1130	LED POWER (W)	CCT	DIM	MOUNTING	OPTIONS
	74W	830	D1 (DALI)	S (Suspended)	UP (UP Lighting) 16W
	96W	840	D2 (Switch Dim)	SM (Surface Mounted)	
	154W		D3 (0-10V)		

MADE IN AUSTRALIA



5 year warranty. Refer to warranty card.

Due to continual improvement through research and development, EL-Electric reserves the right to change specifications without notice. Must be installed by a Licenced Electrician.

Eg - CIRC1130-74W-830-D1-S-UP