

# Green-Lite 385



## FEATURES

- Australian designed and manufactured from high-quality materials
- Modern, low profile design is functional and unobtrusive

## ALL MODELS

- 240VAC 50HZ input (LED: 100-264VAC and over voltage protection; Fluorescent: 220-264VAC)
- Quick-connect push terminal
- Mounting: surface
- Tridonic/CMP/VS iron core ballast as standard - fluorescent only

## LUMINAIRE CONSTRUCTION

- Corrosion-resistant aluminium base plate
- Plexiglas opal diffuser gives soft, even light
- Spring steel clips
- LED version: twist lock diffuser

## OPTIONS: FLUORESCENT


- Diffuser options: satin marble finish, matt finish
- IPX4 rating
- High power factor (HPF)
- Electronic pulse starter
- Low loss ballast
- Fused terminal block
- Electronic ballast (198-264VAC and over voltage protection)

## OPTIONS: LED

- Diffuser options: matt finish
- IPX4 rating
- Fused terminal block
- Dimmable - Phase cut/DALI/Switch Dim

## SUGGESTED APPLICATIONS

- Childcare centres
- Foyers
- Hotels
- Hospitals
- Living areas
- Nursing homes/Aged care
- Residential
  - Bedrooms
  - Bathrooms
  - Kitchens
  - Living area
  - Laundry

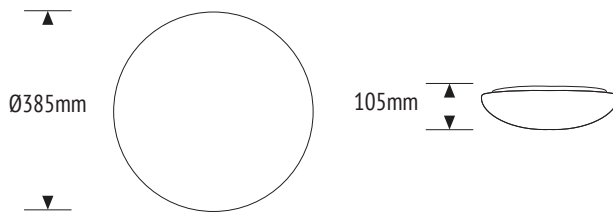

Model	Light Source/Lamp	Lumen Luminaire (lm)	Power Lamp (W)	Power Luminaire (W)	Colour Temp (°K)	Colour Rendering Index (CRI)	Power Factor	LED Qty	LED Type	LED Brand	IP Rating	Dimensions (mm)		Weight (kg)
												Ø	H	
GL385LED17W-830	LED	1845	17	21	3000	>80	0.9	120	2835 SMD	Epistar	IP20	385	105	0.67
GL385LED17W-840	LED	2013	17	21	4000	>80	0.9	120	2835 SMD	Epistar	IP20	385	105	0.67
GL385LED17W-850	LED	2013	17	21	5000	>80	0.9	120	2835 SMD	Epistar	IP20	385	105	0.67
GL32TL	T9 Fluorescent	1670	32	42	3000	84	0.4*	n/a	n/a	n/a	IP20	385	105	1.24
GL32CW	T9 Fluorescent	1670	32	42	4000	82	0.4*	n/a	n/a	n/a	IP20	385	105	1.24
G322HF	T9 Fluorescent	1670	32	42	5000	84	0.4*	n/a	n/a	n/a	IP20	385	105	1.24

\*Correctable to 0.9 (HPF Model)

MADE IN AUSTRALIA



10 year consumer warranty (housing). 5 year warranty (electrical). Refer to warranty card for more information. Due to continual improvement through research and development, EL-Electric reserves the right to change specifications without notice. Must be installed by a Licenced Electrician.