

Green-Lite Slim 485



FEATURES

- Australian designed and manufactured from high quality materials
- Low profile, modern design is functional and unobtrusive
- Electronic control gear

ALL MODELS

- 240VAC 50HZ input (198-264VAC and over voltage protection)
- Quick-connect push terminal
- Mounting: surface
- Tridonic/TCl/VS driver
- Lifetime -50,000 hrs L80 B10

LUMINAIRE CONSTRUCTION


- Corrosion-resistant aluminium base plate
- Plexiglas opal diffuser that gives soft, even light
- Spring steel clips

OPTIONS

- Dimmable: DALI/SwitchDIM/Casambi/Phase
- Phase dim available for 22W only
- IPX4 rating

SUGGESTED APPLICATIONS

- Bathrooms
- Bedrooms
- Childcare centres
- Kitchens
- Living areas
- Nursing homes/Aged care
- Office spaces
- Schools
- Walkways and stairwells

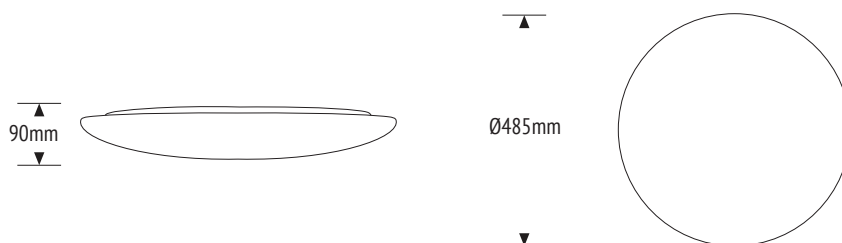

Model	Light Source/Lamp	Lumen Luminaire (lm) 3000°K	Lumen Luminaire (lm) 4000°K	Power Lamp (W)	Power Luminaire (W)	Colour Rendering Index (CRI)	Power Factor	LED Qty	LED Type	LED Brand	IP Rating	Dimensions (mm)		Weight (kg)
												Ø	H	
SLIM485LED18W-XXX	LED	1698	1778	18	21	>85	0.96	16	SMD	Nichia	IP20	485	90	1.4
SLIM485LED22W-XXX	LED	2273	2393	22	26	>85	0.98	16	SMD	Nichia	IP20	485	90	1.4
SLIM485LED27W-XXX	LED	2665	2805	27	32	>85	0.97	16	SMD	Nichia	IP20	485	90	1.4
SLIM485LED32W-XXX	LED	3044	3204	31	37	>85	0.94	16	SMD	Nichia	IP20	485	90	1.4

Ordering Information :

SLIM485LED	LED POWER (W)	CCT	DIM	OPTIONS
	18W	830	D1 (DALI)	IPX4 (Ingress Protection)
	22W	840	D2 (Switch Dim)	MS (Microwave Sensor)
	27W		D3 (0-10V)	
			C (Casambi)	
	32W		P (Phase Cut)	

Eg - SLIM485LED18W-830-D1-IPX4

MADE IN AUSTRALIA



10 year consumer warranty (housing). 5 year warranty (electrical). Refer to warranty card for more information. Due to continual improvement through research and development, EL-Electric reserves the right to change specifications without notice. Must be installed by a Licenced Electrician.