

Metro 300



FEATURES

- Australian designed and manufactured from high-quality materials
- Contemporary design which is stylish, unobtrusive and aesthetically pleasing
- Mounting : surface mount

ALL MODELS

- 240VAC 50HZ input (198-264VAC and over voltage protection)
- Quick-connect push terminal
- White powder-coat
- Tridonic / TCI / VS Driver as standard
- Lifetime - 50,000hrs L80 B10

LUMINAIRE CONSTRUCTION

- Corrosion resistant powder coated aluminium base plate
- Plexiglas opal diffuser that gives soft, even light (matt finish)
- Spring steel clips


OPTIONS:

- Microwave sensor
- Dimmable: DALI/Switch DIM/0-10V
- IPX4 rating
- Casambi Blu-Tooth control
- Custom gear tray design/modifications

(MOQ Apply)

SUGGESTED APPLICATIONS

- Bathrooms
- Bedrooms
- Cafes
- Childcare centres
- Foyers
- Kitchens
- Living areas
- Nursing homes/Aged care
- Office spaces
- Restaurants
- Schools
- Walkways and stairwells

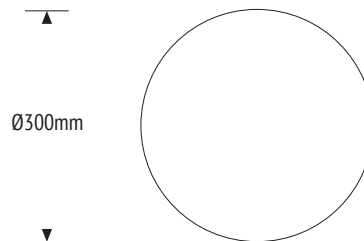

Model	Light Source/Lamp	Lumen Luminaire (lm) 3000°K	Lumen Luminaire (lm) 4000°K	Power Lamp (W)	Power Luminaire (W)	Colour Rendering Index (CRI)	Power Factor	LED Qty	LED Type	LED Brand	IP Rating	Dimensions (mm)		Weight (kg)
												Ø	H	
MR300LED12W-XXX	LED	1155	1216	12	14	>85	0.91	12	SMD	Nichia	IP20	300	70	0.51
MR300LED14W-XXX	LED	1336	1407	14	16	>85	0.93	12	SMD	Nichia	IP20	300	70	0.51
MR300LED17W-XXX	LED	1594	1678	17	19	>85	0.95	12	SMD	Nichia	IP20	300	70	0.51

NOTE: XXX denotes CRI and colour temperature. E.g.: CRI 80 and 3000°K = 830.

Ordering Information :

MR300LED	LED POWER (W)	CCT	DIM	OPTIONS
	12W	830	D1 (DALI)	IPX4 (Ingress Protection)
	14W	840	D2 (Switch Dim)	MS (Microwave Sensor)
	17W		D3 (0-10V)	
			C (Casambi)	
			P (Phase Cut)	

Eg - MR300LED12W-830-D1-IPX4



10 year consumer warranty (housing). 5 year warranty (electrical). Refer to warranty card for more information. Due to continual improvement through research and development, EL-Electric reserves the right to change specifications without notice. Must be installed by a Licenced Electrician.