# Metro 390





## **FEATURES**

- Australian designed and manufactured from high-quality materials
- Contemporary design which is stylish, unobtrusive and aesthetically pleasing
- Mounting: surface mount

#### ALL MODELS

- 240VAC 50HZ input (198-264VAC and over voltage protection)
- Quick-connect push terminal
- White powder-coat
- Tridonic / TCI / VS Driver as standard
- Lifetime 50,000hrs L80 B10

## **LUMINAIRE CONSTRUCTION**


- Corrosion resistant powder coated aluminium base plate
- Plexiglas opal diffuser that gives soft, even light (matt finish)
- Spring steel clips

#### **OPTIONS:**

- Microwave sensor
- Dimmable: DALI/Switch DIM/0-10V
- IPX4 rating
- Casambi Blu-Tooth control
- Custom gear tray design/modifications (MOQ Apply)

## SUGGESTED APPLICATIONS


- Bathrooms
- Bedrooms
- Cafes
- Childcare centres
- Foyers
- Kitchens
- Living areas
- Nursing homes/Aged care
- Office spaces
- Restaurants
- Schools
- Walkways and stairwells

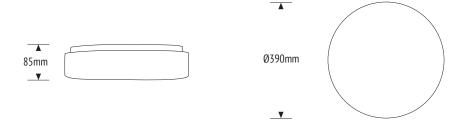

Model	Light Source/Lamp	Lumen Luminaire (lm) 3000°K	Lumen Luminaire (lm) 4000°K	Power Lamp (W)	Power Luminaire (W)	Colour Rendering Index (CRI)	Power Factor	LED Qty	LED Type	LED Brand	IP Rating	Dimer (m		Weight (kg)
MR390LED18W-XXX	LED	1804	1899	18	21	>85	0.90	16	SMD	Nichia	IP20	390	85	0.94
MR390LED22W-XXX	LED	2260	2378	22	26	>85	0.91	16	SMD	Nichia	IP20	390	85	0.94
MR390LED27W-XXX	LED	2641	2780	27	32	>85	0.93	16	SMD	Nichia	IP20	390	85	0.94

NOTE: XXX denotes CRI and colour temperature. E.g.: CRI 80 and 3000°K = 830.

## Ordering Information:



Eg - MR390LED18W-830-D1-IPX4





10 year consumer warranty (housing). 5 year warranty (electrical). Refer to warranty card for more information. Due to continual improvement through research and development, El-Electric reserves the right to change specifications without notice. Must be installed by a Licenced Electrician.