

# Metro Flush 300

## Surface Mount or Pendant



### FEATURES

- Australian designed and manufactured from high-quality materials
- Contemporary design which is stylish, unobtrusive and aesthetically pleasing
- Multiple mounting options

### ALL MODELS

- 240VAC 50HZ input 198-264VAC and over voltage protection
- Quick-connect push terminal
- Mounting: surface or Pendant
- Tridonic driver as standard

### LUMINAIRE CONSTRUCTION


- Corrosion-resistant powder-coated aluminium base plate
- Plexiglas opal diffuser gives soft, even light
- Spring steel clips
- Aluminium tube and canopy for pendant suspension

### OPTIONS:

- Customised pendant lengths up to 3m
- Knuckle joint for raked ceiling pendants
- Dimmable: DALI/SwitchDIM
- IPX4 rating

### SUGGESTED APPLICATIONS

- Bathrooms
- Bedrooms
- Cafes
- Childcare centres
- Foyers
- Kitchens
- Living areas
- Nursing homes/Aged care
- Office spaces
- Restaurants
- Schools
- Walkways and stairwells

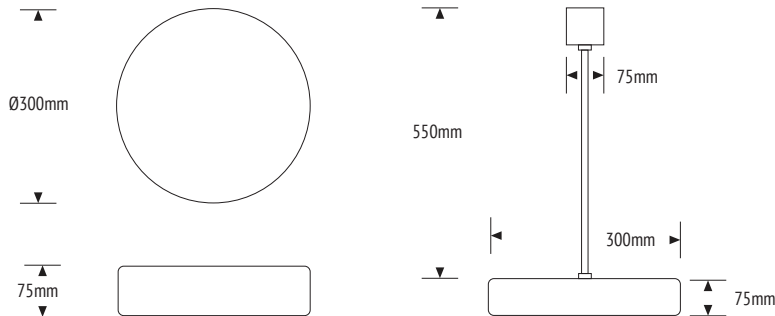

	Model	Light Source/Lamp	Lumen Luminaire (lm) 3000°K	Lumen Luminaire (lm) 4000°K	Lumen Luminaire (lm) 5000°K	Power Lamp (W)	Power Luminaire (W)	Colour Rendering Index (CRI)	Power Factor	LED Qty	LED Type	LED Brand	IP Rating	Dimensions (mm)		Weight (kg)
														Ø	H	
Surface Mount	MRFM300LED12W-XXX	LED	1173	1228	1292	12	15	>80	0.83	12	SMD	Nichia	IP20	300	80	0.68
	MRFM300LED14W-XXX	LED	1344	1407	1481	14	17	>80	0.87	12	SMD	Nichia	IP20	300	80	0.68
	MRFM300LED17W-XXX	LED	1685	1764	1856	17	21	>80	0.92	12	SMD	Nichia	IP20	300	80	0.68
Pendant	MRFM300LED12W-XXXP	LED	1173	1228	1292	12	15	>80	0.83	12	SMD	Nichia	IP20	300	625	1.01
	MRFM300LED14W-XXXP	LED	1344	1407	1481	14	17	>80	0.87	12	SMD	Nichia	IP20	300	625	1.01
	MRFM300LED17W-XXXP	LED	1685	1764	1856	17	21	>80	0.92	12	SMD	Nichia	IP20	300	625	1.01

\*Please note approximate height based on 500mm rod length plus 40mm ceiling hook. Rod length can be customised.  
NOTE: XXX denotes CRI and colour temperature. E.g.: CRI 80 and 3000°K = 830.

MADE IN AUSTRALIA



10 year consumer warranty (housing). 5 year warranty (electrical). Refer to warranty card for more information. Due to continual improvement through research and development, EL-Electric reserves the right to change specifications without notice. Must be installed by a Licenced Electrician.