


Milano 650

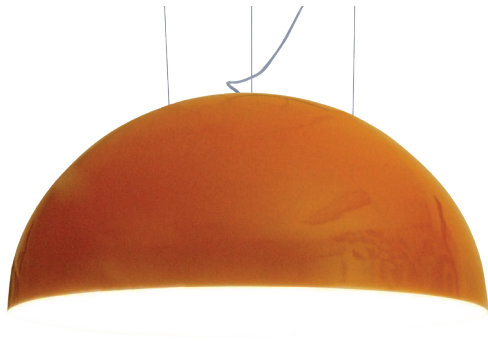

FEATURES

- Colour choices to suit any decor
- Designed and made in Australia
- Energy efficient

ALL MODELS

- 240VAC 50HZ input (198-264VAC and over voltage protection)
- Mounting: suspended
- Direct light source

LUMINAIRE CONSTRUCTION


- Powdercoated spun aluminium
- Plexiglas opal acrylic diffuser
- Stainless steel suspension cables
- Chrome plated brass fixtures

OPTIONS

- Dimmable
- Fused terminal block
- Variety of colour options
- Indirect light source

SUGGESTED APPLICATIONS

- Cafes
- Foyers
- Hotels
- Restaurants
- Shopping centres

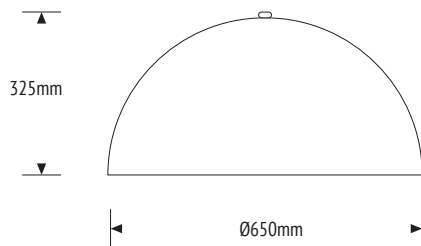

Model	Light Source/Lamp	Lumen Luminaire (lm)	Power Lamp (W)	Power Luminaire (W)	Colour Temp (°K)	Colour Rendering Index (CRI)	Power Factor	LED Qty	LED Type	LED Brand	IP Rating	Dimensions (mm)		Weight (kg)
												Ø	H	
MILANO650LED-16W-830	LED	1944	16	21	3000	>80	0.92	16	SMD	Nichia	IP20	650	325	3.5
MILANO650LED-16W-850	LED	1957	16	21	5000	>80	0.92	16	SMD	Nichia	IP20	650	325	3.5
MILANO650LED-27W-830	LED	3578	27	33	3000	>80	0.95	16	SMD	Nichia	IP20	650	325	3.5
MILANO650LED-27W-850	LED	3578	27	33	5000	>80	0.95	16	SMD	Nichia	IP20	650	325	3.5

MADE IN AUSTRALIA



10 year consumer warranty (housing). 5 year warranty (electrical).

Due to continual improvement through research and development, EL-Electric reserves the right to change specifications without notice. Must be installed by a Licenced Electrician.