

EDGE WALL WASHER



Perfectly balanced - our latest Edge downlight features an angled aluminium body to achieve an asymmetrical beam, ideal for wall washing.

FEATURES

- + Adjustable head up to 25°
- + Precision reflector with clear lens - for better light distribution
- + Specially designed heat sink - for class leading heat dissipation
- + Deep set lamp position - for visual comfort and glare control
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver 13W (71-CAS350)



GENERAL SPECIFICATIONS

LED	13W *operating wattage 14.8
Lumens	1150 lm (3000K) 1210 lm (4000K)
Efficacy	76 lm/w (3000K) 77 lm/w (4000K)
Colour Temperature	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White
Material	Powder Coat Aluminium
Finish	White Black
Beam	15° 24° 36° 60°
CRI	92+
IP	44
Colour Deviation	SDCM ≤2
Lifetime	>55,000hrs L80 B10
Warranty	7 Years

Please Note: When using C-Bus, use universal or trailing edge dimming modules


PROJECT DETAILS

PROJECT: _____

TYPE: _____

NOTES: _____

DIMENSIONS (mm)

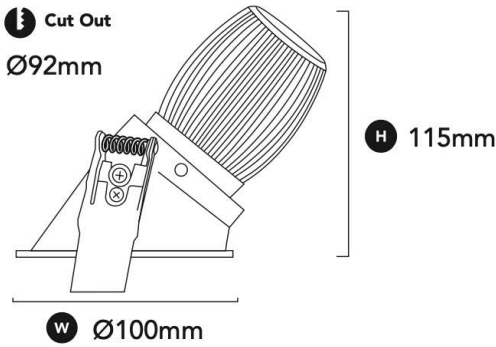

DRIVER SPECIFICATIONS

L 104 x W 43 x H 24mm	
Power	240V Remote Flicker Free Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90
<i>DALI dimming available upon request</i>	

PRODUCT CODES

White, 3000K, 60°	118-ED2A13W603
White, 4000K, 60°	118-ED2A13W604
Black, 3000K, 60°	118-ED2A13B603
Black, 4000K, 60°	118-ED2A13B604

REFLECTOR CODES

15° Reflector	118-RFLP15
24° Reflector	118-RFLP24
36° Reflector	118-RFLP36